



KVN piston valves. The security lies in the principle.

Technical Data – ANSI Standard

CE 0408
Conformity with Pressure
Equipment Directive 97/23/EC



Quality Assurance
according to **ISO 9001!**

*Our production is quality-approved by TÜV,
Lloyd's Reg. of Shipping, Germanischer Lloyd,
American Bureau of Shipping, Det Norske Veritas.*

Specific approvals for various products!



The best solution for steam application, hot water and heat transfer media

Klinger: A success story

In 1893, Richard Klinger founded the parent plant of the Klinger group near Vienna, Austria. Klinger's early inventions included the reflex level gauge and compressed sheet gaskets.

In 1922, Richard Klinger invented the piston valve by replacing the disk and seat of a conventional globe valve with a cylindrical piston and two resilient, replaceable sealing rings. Constant research and development have resulted in sealing rings that provide the piston valve with an extraordinary ability to seal line pressure and prevent leakage to the atmosphere.

Independent testing laboratories have subjected Klinger piston valves to API fire test and Helium leak tests. The Klinger piston valve has outperformed other generic valve types in these tests and these results have been consistently confirmed by extraordinary performance in customer installations.


Over 60 million Klinger piston valves are in service worldwide.

An extraordinary sealing system: Amazingly simple and reliably tight.

A stainless steel piston enclosed by two valve rings makes up the sealing element.

The upper valve ring provides the outer seal, while the lower valve ring seals the passage. The large sealing surface on the piston skirt provides an optimal seal.

When locked, the piston simultaneously pushes any impurities which

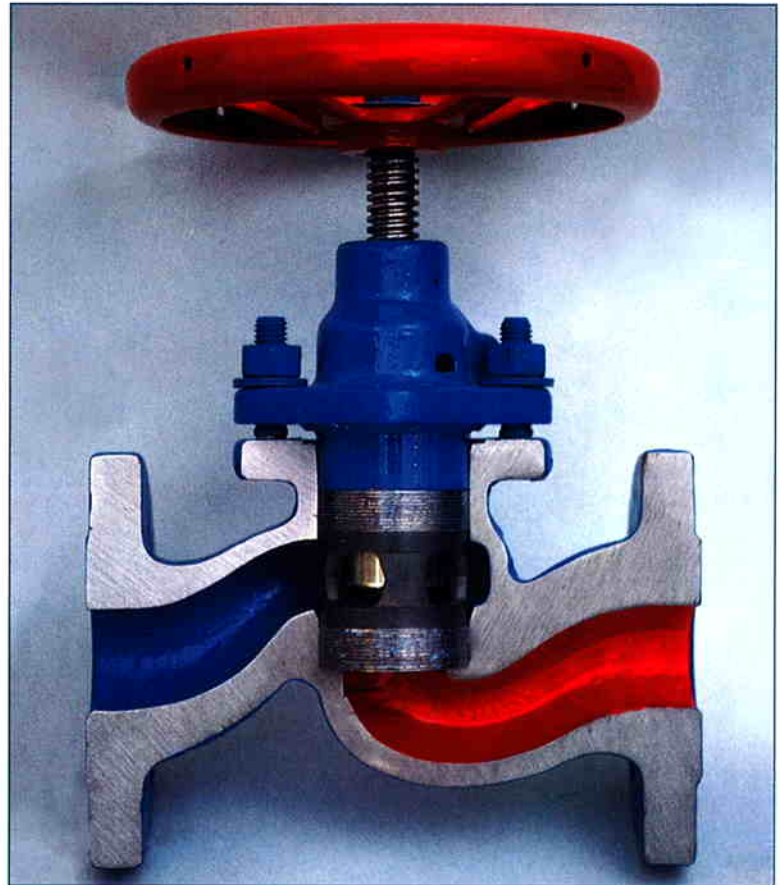

might be present in the medium ahead of itself. Therefore, media with fibrous or contaminated constituents are reliably checked as well.

In principle, damage to the sealing surfaces is excluded. Function is always kept fully intact.

Excellent control characteristics.

The double guidance of the piston in closed position prevents fluttering and vibration in the control setting, and oscillations in the tube.

The KVN is ideal for the bypass around a modulating control valve.

The valve stays in the line while changing the valve-ring.

time.

In case used-up valve rings have to be changed – this is very easily done: The valve does not have to be dismantled.

After the first commissioning the valve is absolutely maintenance free for a long

KVN piston valves. High-tech shut-off valves. Environmentally safe and energy efficient.

The heart of the piston valve:

The KX-module

The valve rings (KX-GT) are made of specially treated graphite.

They have no asbestos – containing materials and make the valve maintenance-free. “Install and forget” is the motto. The coupling pressure on the piston is so high that media are reliably checked up to 900 psi in any aggregate condition and at temperatures ranging from -50° F to +800° F. The various expansion coefficients of the valve components which arise during alternating thermal loads are fully compensated by the KX-GT. Reliably tight in all operating states.



The bonnet (1) presses against the lower component with the sealing element. The two rings (2) and (3) are pre-sealed and increase their coupling pressure on the casing and piston.



The benefits:

- Reliably tight in the line seal
- Reliably tight to the atmosphere
- Meets EPA requirements
- Environmentally safe
- Asbestos-free
- Energy efficient
- No erosion on the sealing surfaces
- Easy to service and economical
- Retightened in the line
- Maintenance-free
- Exceed requirements of API-6 FA fire test
- Excellent control characteristics

The know-how

- CAD, CAM technology
- Production to AD WO, TRD 100 HPO*)
- Quality assurance according to ISO 9001

*) Manufacturer approval to German AD-Merkblatt WO, TRD 100 and HPO for fluid control products by TÜV-Bayern (Germany).

Reliable according to all standards and tests.

The Klinger piston valve passed the fire-safe test according to API 6 FA.

Design Benefits


■ **Maximum compression transmitted to lower ring**

■ **Elimination of leakage due to shaft runout**

■ **Elimination of seal exposed to atmosphere**

■ **Elimination of wire draw**

■ **Live loading extends cycle life**

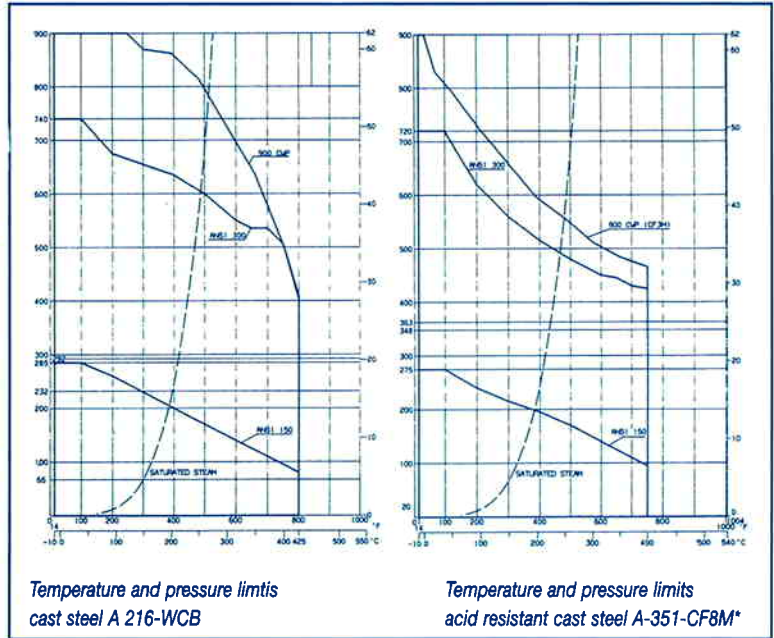

Flow coefficients

Size	ANSI 150	ANSI 300
	C _v	C _v
1/2"	4.9	5.3
3/4"	8.4	9.4
1"	12.5	14.6
1 1/2"	33.5	37.4
2"	55.8	58.6
2 1/2"	75.8	80.7
3"	119	122
4"	185	191
6"	373	392
8"	670.3	681

C_v: Valve parameter (gall/min)


Material Codes

Type	Casting	Upper part	Inner parts	Color of valve
VIII	Cast steel	Cast steel	No copper alloy parts	Blue
Xc	Acid resistant steel	Acid resistant steel	Acid resistant steel	unpainted, pickled

Thrust loads (lbs.)

Valve size (in.)	Line pressure (psi)								
	100	200	300	400	500	600	700	800	900
1/2"	163	190	218	245	272	300	327	355	382
3/4"	259	308	356	405	453	502	551	599	648
1"	375	452	528	604	680	756	832	908	984
1 1/2"	855	1049	1244	1439	1633	1828	2022	2217	2412
2"	1129	1433	1737	2041	2346	2650	2954	3258	3562
2 1/2"	1297	1367	1437	1507	1578	1648	1718	-	-
3"	1550	1620	1691	1761	1831	1901	1971	-	-
4"	2103	2212	2322	2431	2541	2650	2760	-	-
6"	3159	3269	3378	3488	3597	3707	3816	-	-
8"	4191	4301	4410	4520	4629	4739	4848	-	-

Specifications

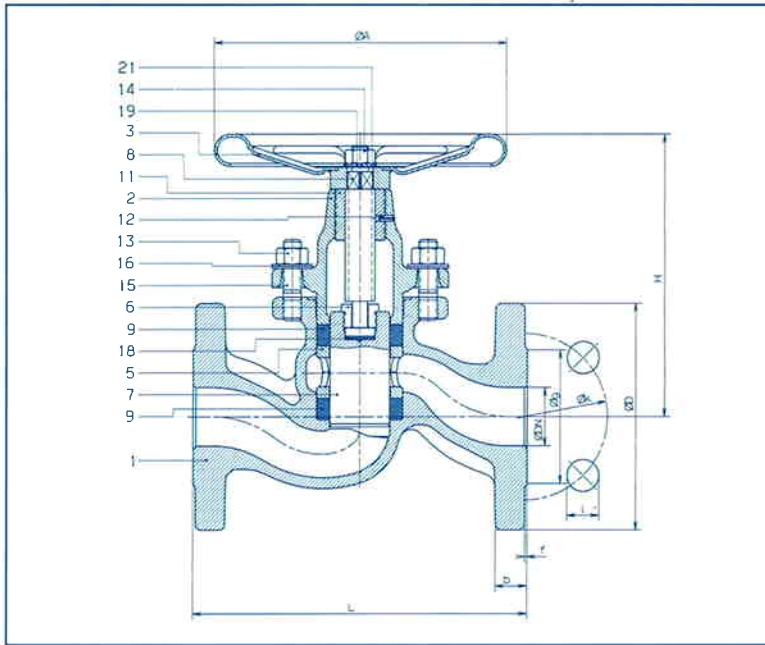

Piston valve
KVN 1/2" - 2"
ANSI 150/300
flanged

Overall length

ANSI 150: ANSI B 16.10 Class 150
 ANSI 300: ANSI B 16.10 Class 300

Connection

ANSI 150: Flange according to
 ANSI B 16.5-Class 150 RF
 ANSI 300: Flange according to
 ANSI B 16.5-Class 300 RF

Material

Carbon steel – Klinger mat. code VIII
 Acid resistant steel –
 Klinger mat. code Xc

Parts	Steel (VIII)	Stainless (Xc)
1 Body	A-216 Grade WCB	A-351-CF8M
2 Bonnet	A-216 Grade WCB	A-351-CF8M
3 Handwheel	Steel	Steel
5 Lantern bush	Sintered steel	A-351-CF8M
6 Split nut	AISI 1213	AISI 316-Ti
7 Piston	A-276-430F	AISI 316L
8 Spindle	A-276-430F	AISI 316L
9 Valve ring	KX-GT	KX-GT
11 Threaded bush	Sintered steel	AISI 316

Parts	Steel (VIII)	Stainless (Xc)
12 Tension pin	Spring steel	Stainless Steel
13 Hex. nuts	A-194 2H	A 193 B8
14 Hex. nuts	A-194 2H	A 193 B8
15 Stud bolts	A-193 B7	A 193 B8
16 Belleville washer	AISI 6150	AISI 1070
18 Disc	AISI 02	AISI 316 Ti
19 Disc	Steel	Stainless steel
21 Type plate	Al	Al

Dimensions (In.)

Size	A	H	g	f	Stroke	L		D		b		Wt (lb.)		Drilling 150			Drilling 300		
						150	300	150	300	150	300	150	300	No	l	øk	No	l	øk
1/2"	5	4.2	1.38	0.06	0.9	4.25	6	3.50	3.75	0.5	0.61	5.4	7.5	4	0.62	2.38	4	0.62	2.62
3/4"	5	4.8	1.69	0.06	1.1	4.62	7	3.88	4.62	0.53	0.7	7.8	11.2	4	0.62	2.75	4	0.75	3.25
1"	6.3	5.6	2	0.06	1.3	5	8	4.25	4.88	0.61	0.75	11	15.4	4	0.62	3.12	4	0.75	3.50
1 1/2"	8	7.6	2.88	0.06	1.7	6.5	9	5	6.12	0.75	0.87	23.4	30.5	4	0.62	3.88	4	0.88	4.50
2"	9.8	8.6	3.62	0.06	2	8	10.5	6	6.50	0.8	0.96	36	44.6	4	0.75	4.75	8	0.75	5


Part 11 Threaded bush } only for DN 1 1/2"
 Part 12 Tension pin } and DN 2"

Piston valve
KVMN 1/2" - 2" NPT
900 CWP*)
Female screwed ends

Connection
 NPT thread to ANSI B2.1

Material
 Carbon steel – Klinger mat. code VIII
 Acid resistant steel –
 Klinger mat. code Xc

*) Temperature/Pressure limits see
 Page 4.

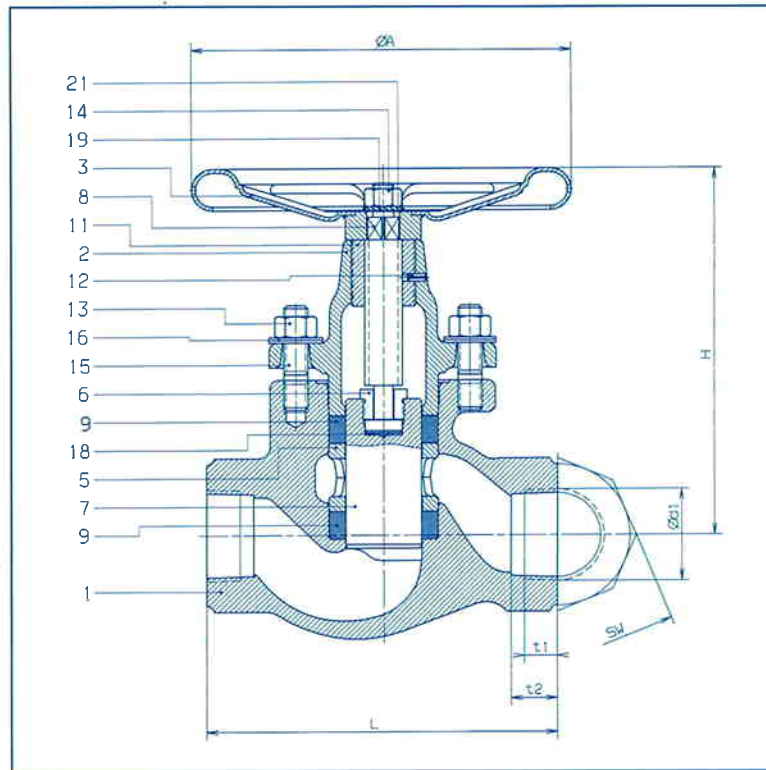

Parts	Steel (VIII)	Stainless (Xc)
1 Body	A-216 Grade WCB	A-351-CF8M
2 Bonnet	A-216 Grade WCB	A-351-CF8M
3 Handwheel	Steel	Steel
5 Lantern bush	Sintered steel	A-351-CF8M
6 Split nut	AISI 1213	AISI 316-Ti
7 Piston	A-276-430F	AISI 316L
8 Spindle	A-276-430F	AISI 316L
9 Valve ring	KX-GT	KX-GT
11 Threaded bush	Sintered steel	AISI 316


Parts	Steel (VIII)	Stainless (Xc)
12 Tension pin	Spring steel	Stainless Steel
13 Hex. nuts	A-194 2H	A 193 B8
14 Hex. nuts	A-194 2H	A 193 B8
15 Stud bolts	A-193 B7	A 193 B8
16 Belleville washer	AISI 6150	AISI 1070
18 Disc	AISI 02	AISI 316 Ti
19 Disc	Steel	Stainless steel
21 Type plate	Al	Al

Dimensions (In.)

Size	L	H	Stroke	A	d1	t1	t2	Wt (lb.)	SW
1/2"	4	4.2	0.9	5	1/2" - 14 NPT	0.53	0.76	3.9	1.41
3/4"	4.75	4.8	1.1	5	3/4" - 14 NPT	0.55	0.78	6.3	1.61
1"	5.3	5.6	1.3	6.3	1" - 11.5 NPT	0.66	0.94	8.9	1.96
1 1/2"	7.3	7.6	1.7	8	1 1/2" - 11.5 NPT	0.68	0.96	21.6	2.95
2"	8.7	8.6	2	9	2" - 11.5 NPT	0.70	0.98	34.8	3.54

Part 11 Threaded bush } only for DN 1 1/2"
 Part 12 Tension pin } and DN 2"

Specifications

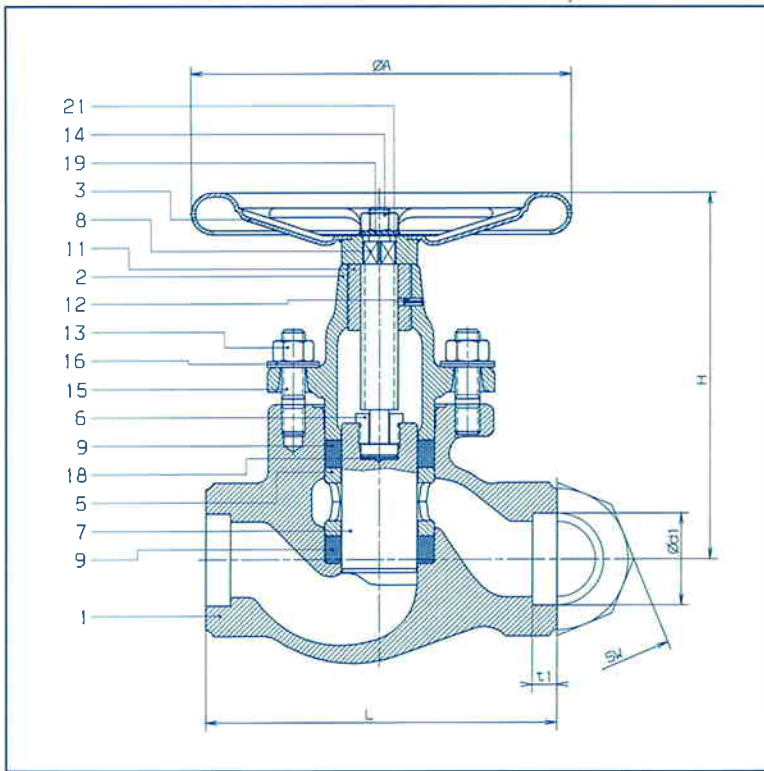

Piston valve
KVSN 1/2" - 2" sw
900 CWP*)
Socket weld ends

Connection
 Socket weld ends to
 ANSI B 16.11-1966

Material
 Carbon steel – Klinger mat. code VIII
 Acid resistant steel –
 Klinger mat. code Xc

*) Temperature/Pressure limits see
 Page 4.

Parts	Steel (VIII)	Stainless (Xc)
1 Body	A-216 Grade WCB	A-351-CF3M
2 Bonnet	A-216 Grade WCB	A-351-CF8M
3 Handwheel	Steel	Steel
5 Lantern bush	Sintered steel	A-351-CF8M
6 Split nut	AISI 1213	AISI 316-Ti
7 Piston	A-276-430F	AISI 316L
8 Spindle	A-276-430F	AISI 316L
9 Valve ring	KX-GT	KX-GT
11 Threaded bush	Sintered steel	AISI 316

Parts	Steel (VIII)	Stainless (Xc)
12 Tension pin	Spring steel	Stainless Steel
13 Hex. nuts	A-194 2H	A 193 B8
14 Hex. nuts	A-194 2H	A 193 B8
15 Stud bolts	A-193 B7	A 193 B8
16 Belleville washer	AISI 6150	AISI 1070
18 Disc	AISI 02	AISI 316 Ti
19 Disc	Steel	Stainless steel
21 Type plate	Al	Al

Dimensions (in.)

Size	L	H	Stroke	A	d1	t1	Wt (lb.)	SW
1/2"	4	4.2	0.9	5	0.86	0.4	3.9	1.41
3/4"	4.75	4.8	1.1	5	1.07	0.51	6.3	1.61
1"	5.3	5.6	1.3	6.3	1.33	0.51	8.9	1.96
1 1/2"	7.3	7.6	1.7	8	1.92	0.51	21.6	2.95
2"	8.7	8.6	2	9	2.41	0.63	34.8	3.54

Part 11 Threaded bush } only for DN 1 1/2"
 Part 12 Tension pin } and DN 2"

Piston valve
KVSN 1/2" - 2" bw
900 CWP*)
Butt weld ends


Connection

Butt weld ends to
 ANSI Class 300

Material

Carbon steel – Klinger mat. code VIII
 Acid resistant steel –
 Klinger mat. code Xc

*) Temperature/Pressure limits see
 Page 4.

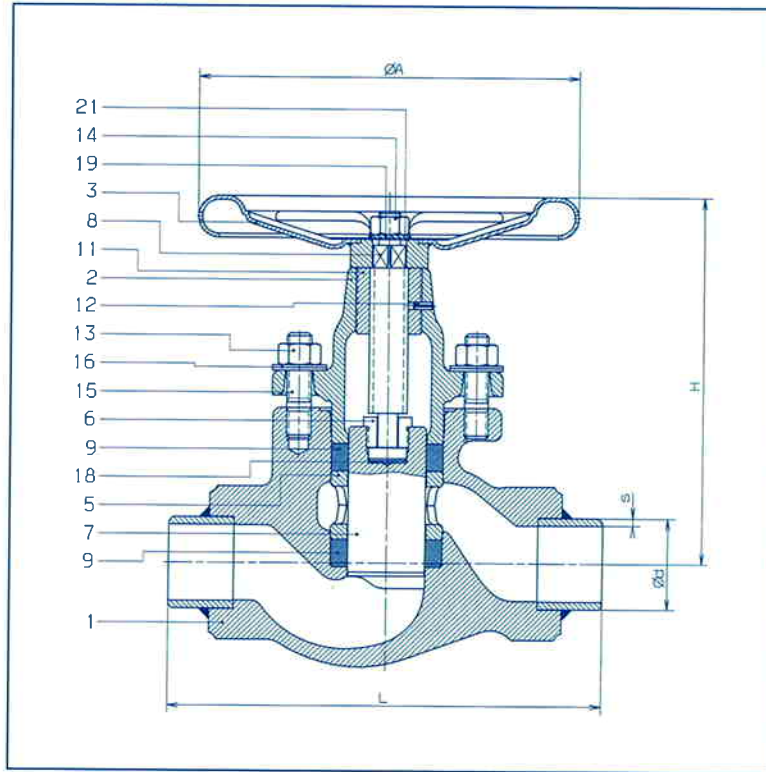

Parts	Steel (VIII)	Stainless (Xc)
1 Body	A-216 Grade WCB	A-351-CF3M
2 Bonnet	A-216 Grade WCB	A-351-CF8M
3 Handwheel	Steel	Steel
5 Lantern bush	Sintered steel	A-351-CF8M
6 Split nut	AISI 1213	AISI 316-Ti
7 Piston	A-276-430F	AISI 316L
8 Spindle	A-276-430F	AISI 316L
9 Valve ring	KX-GT	KX-GT
11 Threaded bush	Sintered steel	AISI 316

Parts	Steel (VIII)	Stainless (Xc)
12 Tension pin	Spring steel	Stainless Steel
13 Hex. nuts	A-194 2H	A 193 B8
14 Hex. nuts	A-194 2H	A 193 B8
15 Stud bolts	A-193 B7	A 193 B8
16 Belleville washer	AISI 6150	AISI 1070
18 Disc	AISI 02	AISI 316 Ti
19 Disc	Steel	Stainless steel
21 Type plate	Al	Al

Dimensions (In.)

Size	L	H	Stroke	A	d	s	Wt (lb.)
1/2"	6	4.2	0.9	5	0.84	0.11	4.13
3/4"	7	4.8	1.1	5	1.06	0.11	6.65
1"	8	5.6	1.3	6.3	1.32	0.14	9.45
1 1/2"	9	7.6	1.7	8	1.90	0.16	22.36
2"	10.5	8.6	2	9	2.37	0.16	35.78

Part 11 Threaded bush } only for DN 1 1/2"
 Part 12 Tension pin } and DN 2"